

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
13 January 2005 (13.01.2005)

PCT

(10) International Publication Number
WO 2005/003506 A3

(51) International Patent Classification⁷: **E21B 17/02**

(21) International Application Number:
PCT/GB2004/002941

(22) International Filing Date: 5 July 2004 (05.07.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0315666.8 4 July 2003 (04.07.2003) GB
0323146.1 3 October 2003 (03.10.2003) GB
0407600.6 2 April 2004 (02.04.2004) GB

(71) Applicant and

(72) Inventor: **HEAD, Philip** [GB/GB]; Gibb House, Kennel
Ride, Ascot, Berks SL5 7NT (GB).

(74) Agent: **HILLGATE PATENT SERVICES**; 6 Aztec Row,
Islington, London N1 0PW (GB).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).


Published:

— with international search report

(88) Date of publication of the international search report:
17 February 2005

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: METHOD OF DEPLOYING AND POWERING AN ELECTRICALLY DRIVEN DEVICE IN A WELL

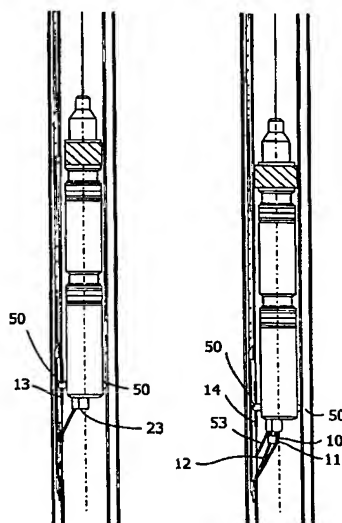

(57) Abstract: A system for installing a powered device (21) in a downhole tube, comprising a power line 52 disposed along a production tube which terminates in a first power connector (10), an orientation means (13) disposed in the vicinity of the first power connector, and a powered device including a second power connector (23). The powered device is lowered down the production tube and oriented by the orientation means so that the first power connector means and second power connector means engage to connect the powered device to the power line. In another embodiment, the system comprises a power line disposed along a production tube, terminating in a first power connector, and a powered device including a second power connector, one or both of the connectors being radially displaced as the powered tool is lowered such that the connectors are aligned for engagement.